
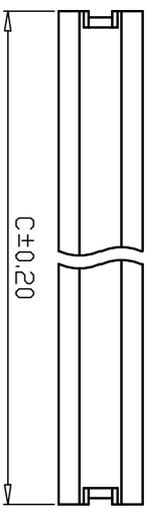


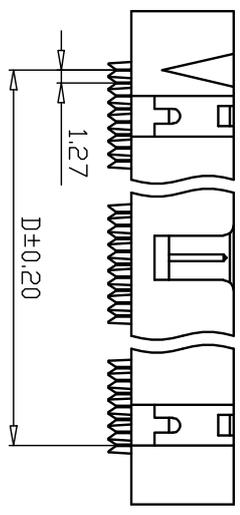


REV.	ECN NO.	DATE
A	N/A	2010/08/15

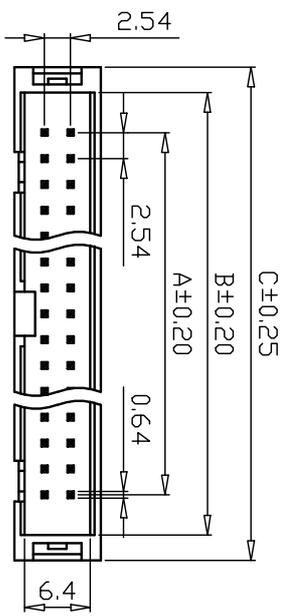

Material:  
 Insulator: PBT+30% Glass Fiber (UL94V-0),  
 Contact: Copper Alloy,  
 Contact Plated: Gold or Tin over Nickel Plated.  
 Specification:  
 Current Rating: 1 Amp,  
 Withstanding Voltage: AC 500V for 1 Minute,  
 Insulation Resistance: 1000MΩ Min. at DC 500V,  
 Contact Resistance: 15mΩ Max.,  
 Operating Temperature: -40°C ~ +105°C,  
 Contact Material: Brass

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
10	10.16	18.15	22.95	11.43
14	15.24	23.23	28.03	16.51
16	17.78	25.77	30.57	19.05
20	22.86	30.85	35.65	24.13
24	27.94	35.93	40.73	29.21
26	30.48	38.47	43.27	31.75
30	35.56	43.55	48.35	36.83
34	40.64	48.63	53.43	41.91
40	48.26	56.25	61.05	49.53
50	60.96	68.95	73.75	62.23
60	73.66	81.65	86.45	74.93
64	78.74	86.73	91.53	80.01

<b>SIGNATURE</b>	<b>DATE</b>	<b>TITLE:</b> 2.54mm IDC Box Header Without Ear Type		<b>CODE NO.</b>	-----	<b>TOLERANCE:</b>	X. ±0.2 .XX ±0.10 ANG.		<b>深圳市深富盛电子有限公司</b>
DRN. GRP	2010/08/15	<b>Q&amp;T P/N:</b>	BF Series	<b>CUS. P/N:</b>		<b>SCALE</b>	None		<b>DRAWING NO.</b>
CHK.						<b>UNIT</b>	mm		BF002
APP.				<b>PAGE</b>	1/1				